






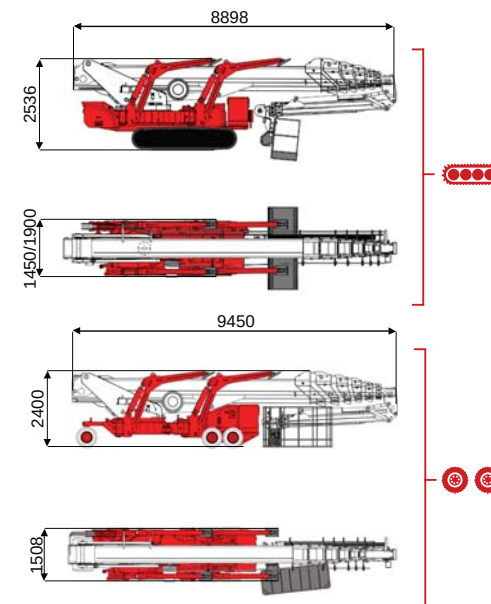

52 m ↑
19,5 m →
400 Kg 🧑🧑🧑🧑

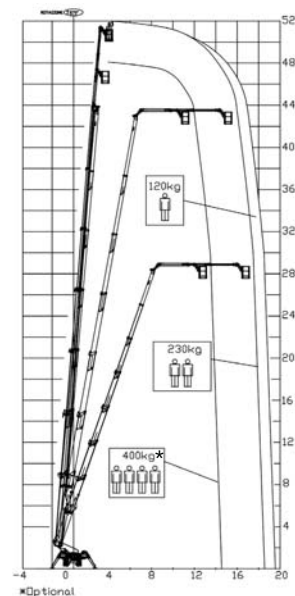

14000 mm	18000 mm	19000 mm	12000 mm	16000 mm	L1	L2	W1	W2	W3
400 kg	230 kg	120 kg	400 kg	120/230 kg	6250 mm	6946 mm	5000 mm	4500 mm	4000 mm

BI-ENERGY
Diesel+AC



XTJ 52/C



52 m

19,5 m

400 kg

170°

660°

240x70 cm

90°+80°

4-5 m

15%

40%

1,5 km/h

14000 kg

95 kN

4,19 kN/m²

6,55 kN/m²

1450/1900 mm

8898 mm

2536 mm

XTJ 52/R



52 m

19,5 m

400 kg

170°

660°

240x70 cm

90°+80°

4-5 m

15%

25%

1,4 km/h

13000 kg

95 kN

3,90 kN/m²

6,09 kN/m²

1508 mm

9450 mm

2400 mm



Battery type



Battery charge



Add. Weight



Autonomy



Charging time



Electropump

ECO

DC+AC



48V 270 A/h 5h

230V-48V 45A

400 kg

6-7 h endless

7h

48V 9 kW



Palazzani
INDUSTRIE

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

Palazzani Industrie S.p.A.
Via del Pavione, 4
25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073 Fax (+39) 030657079
platforms@palazzani.it
www.palazzani.it



49 m ↑
16,5 m →
500 Kg ⚙️

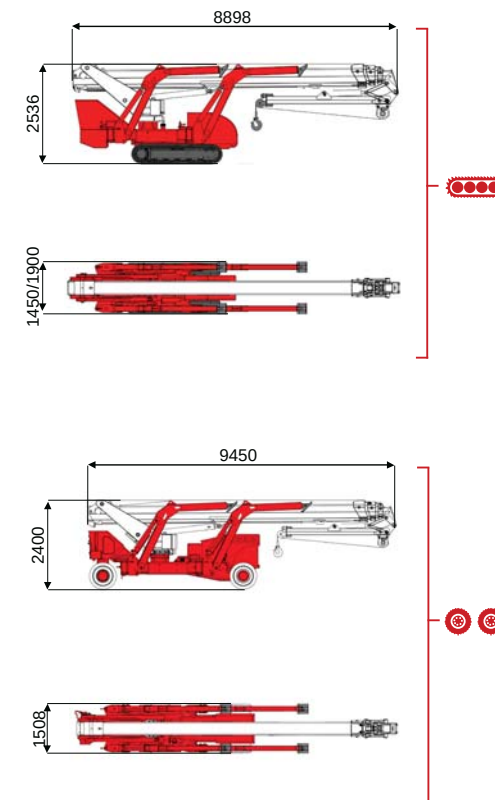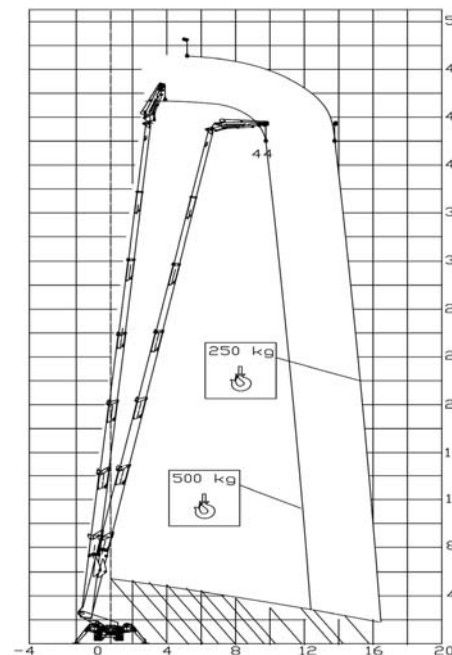

BI-ENERGY Diesel+AC																
XTJ 52/C		49 m	16,5 m	500 kg	660°	5 m	20%	40%	1,5 km/h	14000 kg	95 kN	4,19 kN/m²	6,55 kN/m²	1450/1900 mm	8898 mm	2536 mm
XTJ 52/R		49 m	16,5 m	500 kg	660°	5 m	20%	25%	1,4 km/h	13000 kg	95 kN	3,90 kN/m²	6,09 kN/m²	1508 mm	9450 mm	2400 mm

Battery type	Battery charge	Add. Weight	Autonomy	Charging time	Electropump
ECO	DC+AC				
48V 270 A/h 5h	230V-48V 45A	400 kg	6-7 h endless	7h	48V 9kW

Palazzani
INDUSTRIE

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

Palazzani Industrie S.p.A.
Via del Pavione, 4
25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073 Fax (+39) 030657079
platforms@palazzani.it
www.palazzani.it